

Technical data sheet

Quick Clip, flame-resistant, stone grey

Item number: 2149333



Flame-resistant, flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.




PP Polypropylene

Master data

| | |
|---------------------|----------------------|
| Item number | 2149333 |
| Type | 2955 F M50 STGR |
| Description 1 | Quick clip |
| Description 2 | flame-resistant |
| Manufacturer | OBO |
| Dimension | M50 |
| Colour | Stone grey; RAL 7030 |
| Material | Polypropylene |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 1.454 kg |
| Weight unit | kg/100 pc. |

Dimensions

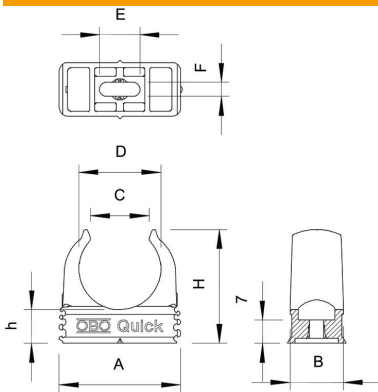

| | |
|-------------|---------|
| Dimension A | 70.3 mm |
| Dimension B | 18 mm |
| Dimension C | 32 mm |
| Dimension D | 49 mm |
| Dimension E | 12 mm |
| Dimension F | 6 mm |
| Dimension h | 14 mm |
| Dimension H | 63 mm |

Technical data

| | |
|------------------------|--|
| Expandable | yes |
| Number of cables/pipes | 1 |
| Pull-out value | 135 N |
| Fastening type | Screw hole |
| Flame-resistant | Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750 °C |

Technical data sheet

Quick Clip, flame-resistant, stone grey

Item number: 2149333



Technical data

| | |
|-------------------------|--|
| Closed | no |
| Halogen-free | yes |
| With inlay | no |
| Nominal size/text | M50 |
| Quick clip installation | Durchgangsloch,_auf_M6_Gewinde_aufschraubbar |
| UV-resistant | no |