


# Technical data sheet

## Quick clip, aluminium

Item number: 2149932

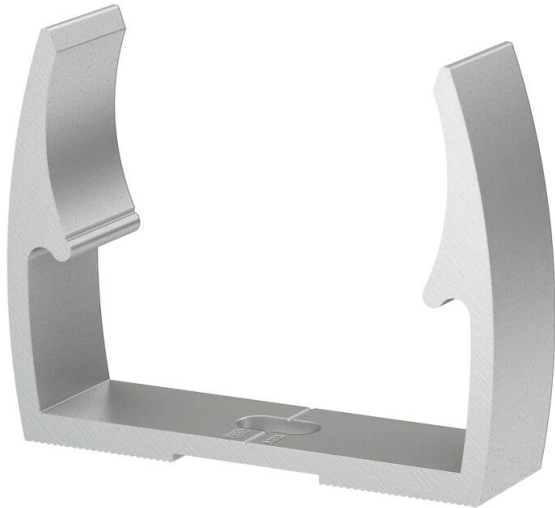

OBO Quick clip, type ALQ M, for all metric ALU pipe systems, as well as light-duty and heavy-duty insulation pipes. Suitable for mounting the OBO pipe system, material: aluminium. Pipe centring aids allow optimal attachment of the pipe and automatically turn the clip into the correct position.

Slot for side alignment during mounting with wood screw or knock-in anchor.

Recommended fastening spacing 50–60 cm.



**Alu** Aluminium

### Master data

|                                   |                         |
|-----------------------------------|-------------------------|
| Item number                       | 2149932                 |
| Type                              | ALQ M32                 |
| Description 1                     | Quick clip              |
| Manufacturer                      | OBO                     |
| Dimension                         | M32                     |
| Material                          | Aluminium               |
| Smallest sales unit               | 50                      |
| Unit of quantity                  | Piece                   |
| Weight                            | 1.6 kg                  |
| Weight unit                       | kg/100 pc.              |
| CO Footprint (GWP) Cradle-to-Gate | 0,2652 kg COe / 1 Piece |


# Technical data sheet

Quick clip, aluminium

Item number: 2149932



## Dimensions

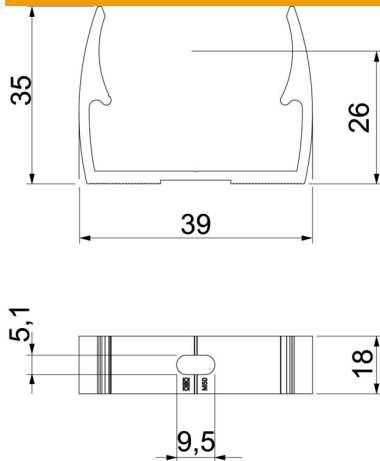

|             |        |
|-------------|--------|
| Dimension A | 39 mm  |
| Dimension B | 18 mm  |
| Dimension E | 5.1 mm |
| Dimension F | 9.5 mm |
| Dimension h | 26 mm  |
| Dimension H | 35 mm  |

## Technical data

|                        |            |
|------------------------|------------|
| Expandable             | no         |
| Number of cables/pipes | 1          |
| Pull-out value         | 120 N      |
| Fastening type         | Screw hole |
| Closed                 | no         |
| Halogen-free           | no         |
| With inlay             | no         |
| Nominal size           | 32         |
| Clamping range D, max. | 32 mm      |
| Clamping range D, min. | 32 mm      |
| UV-resistant           | yes        |