


# Technical data sheet

Underfloor duct, 2 pieces, 3-compartment, duct height  
58 mm

Item number: 7400293

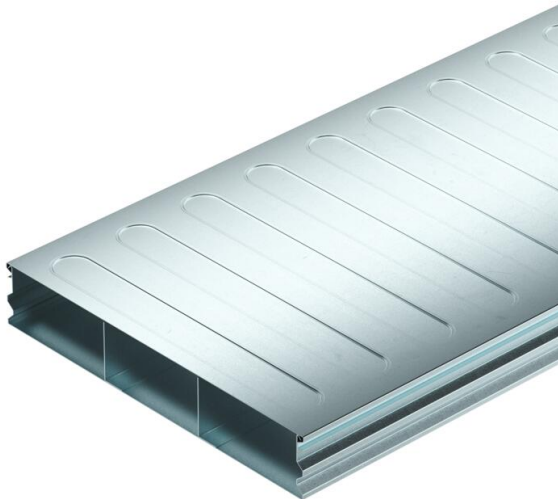

Underfloor duct (2 piece) for routing cables in screed-covered underfloor systems, according to EN 50085-2-2. Removable and continuously lockable trunking lid. With separating retainer in the trunking base. Only compatible with the UZD250-4/350-4.

The profiled side walls offer a locking mechanism to lock the duct cover onto the duct base. The stiffening beads in the duct cover serve to create stability.



St	Steel
FS	Strip galvanized

## Master data

Item number	7400293
Type	S3 35058-2
Description 1	Underfloor duct, 2-part
Description 2	3 compartments
Manufacturer	OBO
Dimension	2000x350x58
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	422.969 kg
Weight unit	kg/100 m
CO Footprint (GWP) Cradle-to-Gate	12,0069 kg COe / 1 Meter


# Technical data sheet

Underfloor duct, 2 pieces, 3-compartment, duct height  
58 mm

Item number: 7400293



## Dimensions



Length	2,000 mm
Width	350 mm
Height	58 mm
Dimension a	120 mm
Dimension b	110 mm
Dimension h	58 mm

## Technical data

Number of fixed partitions	2
Number of compartments	3 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Trunking width, min.	350 mm
Duct height, min.	58 mm
Usable cross-section	18794 mm <sup>2</sup>
Removable cover	yes
Cross-section, draw a	6341 mm <sup>2</sup>
Cross-section, draw b	6112 mm <sup>2</sup>
Vertical load, large area	to 2,000 N